


# How to update firmware (FPGA) of all PicPort \*\* Cameralink and PicPort Elite frame grabber.



Download the firmware file according your hardware and unpack all files into a subdirectory. Start the Frame Grabber Firmware Update Tool which is included in your LVSDS installation.




Press "Open update file for this board.." and select the directory to which you unpacked the firmware files. The tool will offer you these files which are compatible with your current PicPort hardware.

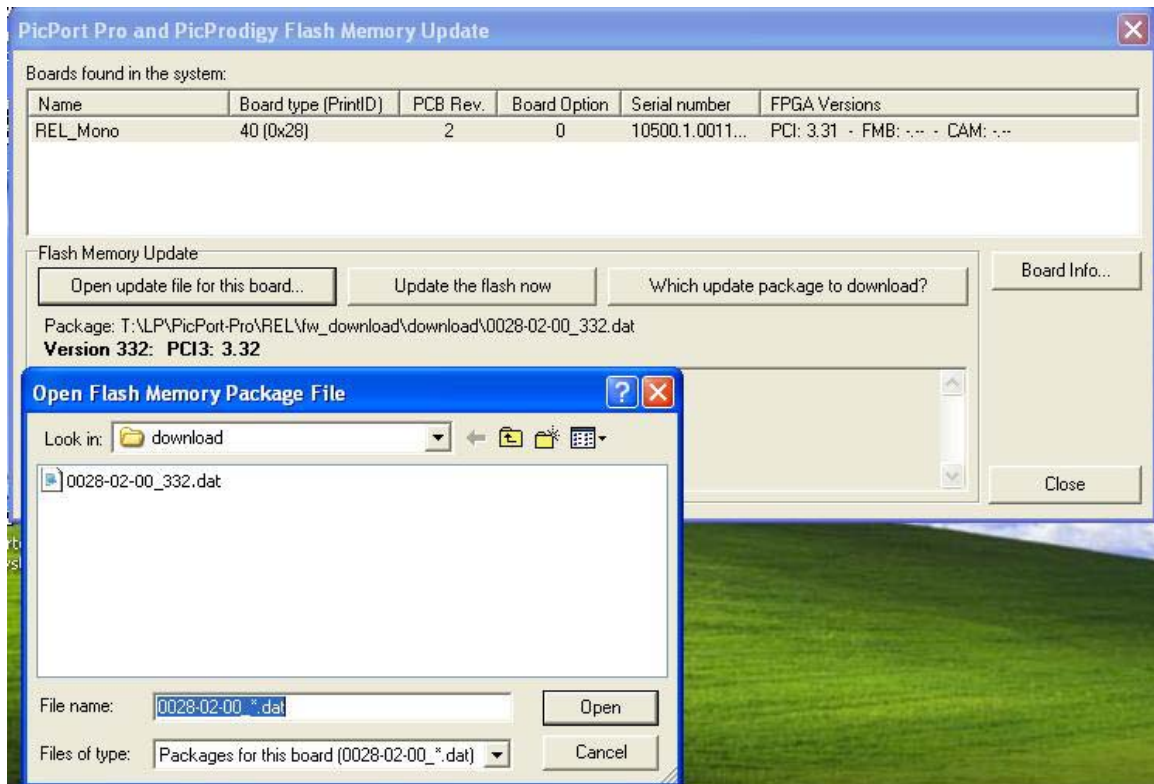

## How to update firmware (FPGA) of all PicPort \*\* Cameralink and PicPort Elite frame grabber.




Close all other programmes you have currently running, then press "Update the flash now". After confirmation of the warning message a progress bar will show up, however depending on you graphic card settings it may be that the progress indication will show up only at the end of the programming procedure. In this case do not interrupt the program until you get the success message, as the

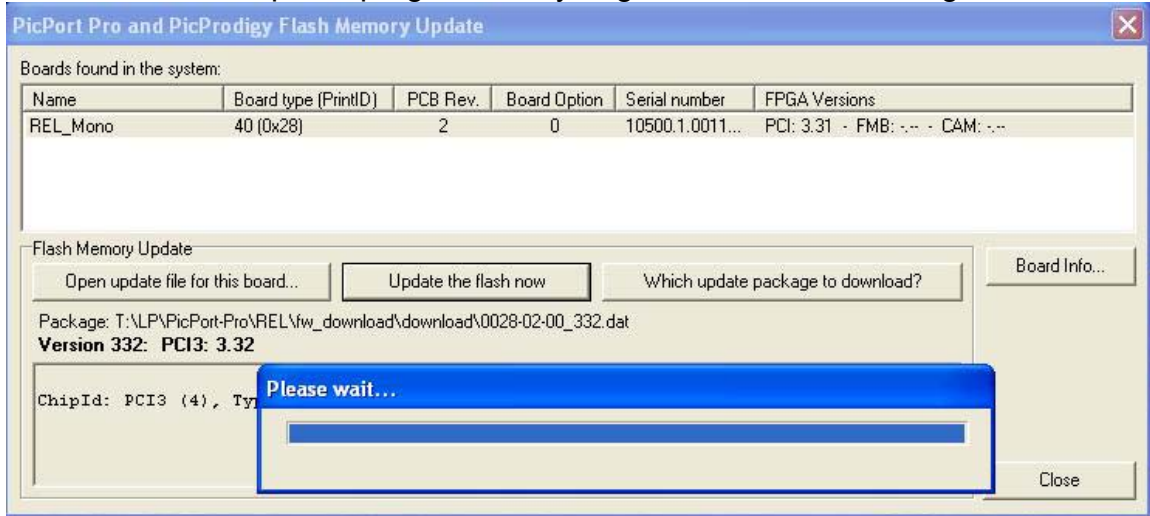

update of the new firmware will take several minutes.

If you interrupt the programming before the success message, the PicPort may not work any more. For this case you can activate the such called "golden copy" for fail safe, for details please refer to the "getting started manual"

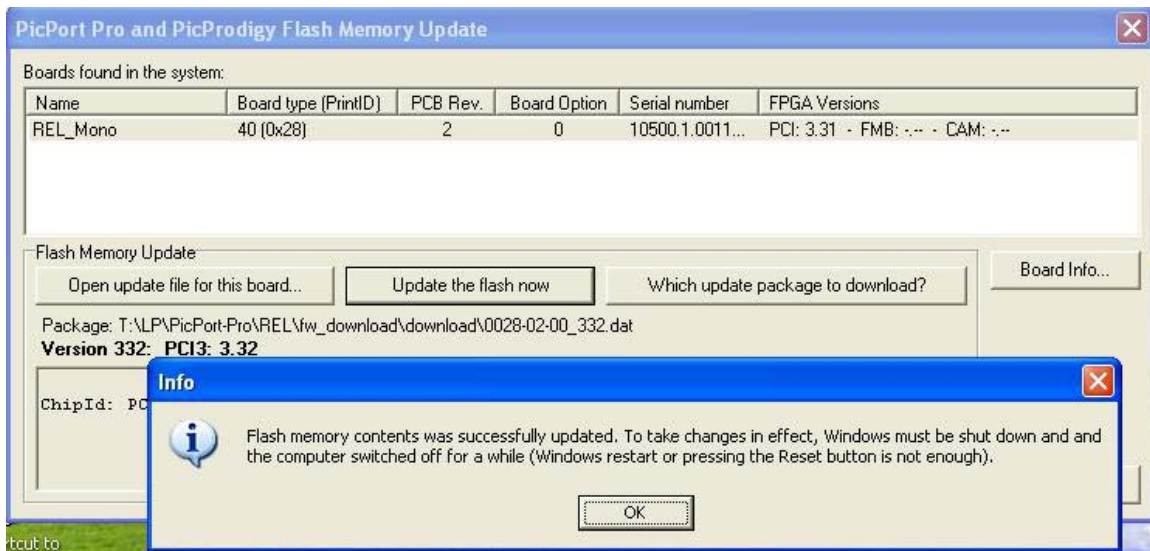

After the flash memory was successfully updated, you need to power down the PC, wait some seconds and power up again. Now the PicPort is using the new firmware, the new version can be verified with the update tool.