


PicSight R502B-GigE-AS

GigE Vision camera

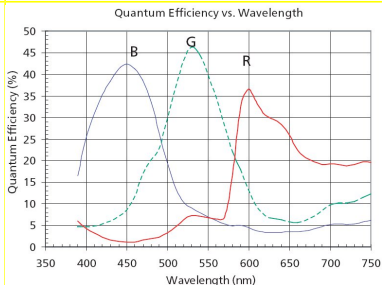

Technical specifications

Interface	Ethernet 1000/100/10 Mb/s
Sensor	1/2.5" CMOS, sequential readout, type Aptina MT9P031
Spectral sensitivity	 <p>The graph shows Quantum Efficiency (%) on the y-axis (0 to 50) versus Wavelength (nm) on the x-axis (350 to 750). Three curves are plotted: Blue (B), Green (G), and Red (R). The Blue curve peaks at approximately 45% efficiency around 450 nm. The Green curve peaks at approximately 45% efficiency around 550 nm. The Red curve peaks at approximately 35% efficiency around 600 nm.</p>
Monochrome/color	bayer pattern
Output image resolution (H×V)	2592 × 1944 pixels
Frame rate	10 fps
Video format	12-bit, single tap
Scanning	progressive
Pixel size (H×V)	2.2 × 2.2 μm
Sensor size (H×V)	5.702 × 4.277 mm
Shutter	rolling, 47 μs – 55000 ms (default 10 ms)
Operating (trigger) modes	<ul style="list-style-type: none">• Free running• Triggered mode• Global reset mode
Gain & black level	<ul style="list-style-type: none">• Analog gain: 0 .. 18.06 dB (default 0 dB)• Digital gain: 0 .. 24.08 dB (default 0 dB)• Black level: 0 .. 2.55 DN (default 0 DN)
Auto functions	<ul style="list-style-type: none">• Automatic black level
Area of interest (AOI)	Horizontal and vertical AOI applicable directly at the sensor
Binning	<ul style="list-style-type: none">• Horizontal: 2× 4×• Vertical: 2× 4×
Decimation	<ul style="list-style-type: none">• Horizontal: 2× 3× 4× 5× 6× 7×• Vertical: 2× 3× 4× 5× 6× 7× 8×
Mount	C-mount (CS-mount on request)
Dimension	<ul style="list-style-type: none">• 44.8×31.4×91.7 mm (W×H×L, without connectors) — standard version• 44.8×37.56×96.0 mm (W×H×L, without connectors) — right angle version
Weight	145 g
Power input	10-26V/5W

Ordering information

Ordering number	Product name	Option
451202	PicSight R502B-GigE-AS	Hirose/SDR-26 connector
451203	PicSight R502B-GigE-AS-H	Hirose/SDR-26 connector, 90° lens mount
451227	PicSight R502B-GigE-PoE-S	PoE, Hirose/SDR-26 connector
451228	PicSight R502B-GigE-PoE-S-H	PoE, Hirose/SDR-26 connector, 90° lens mount
451302	PicSight R502B-GigE-AS-RTF	Realtime function, lens controller, Hirose/SDR-26 connector
451303	PicSight R502B-GigE-AS-RTF-H	Realtime function, lens controller, Hirose/SDR-26 connector, 90° lens mount
451327	PicSight R502B-GigE-PoE-S-RTF	PoE, Realtime function, lens controller, Hirose/SDR-26 connector
451328	PicSight R502B-GigE-PoE-S-RTF-H	PoE, Realtime function, lens controller, Hirose/SDR-26 connector, 90° lens mount

Check latest price list or contact us to learn if more options are available.

Headquarters (Switzerland)
 Leutron Vision AG
 Industriestrasse 57
 CH-8152 Glattbrugg, Switzerland
 Phone ++41 44 809 88 22
 fax ++41 44 809 88 29
 intsales@leutron.com
www.leutron.com

Germany
 Leutron Vision GmbH
 Macairestrasse 3
 D-78467 Konstanz, Germany
 Phone ++49 7531 5942 0
 fax ++49 7531 594299
 desales@leutron.com
[>www.leutron.com/de/](http://www.leutron.com/de/)

North America
 Leutron Vision Inc.
 38 East Street
 Halifax, MA 02338, USA
 Phone: ++1 888 442 2269 x1
 Fax: ++1 781 353 3943
 ussales@leutron.com
www.leutron.com/

Czech Republic
 Leutron Vision s.r.o.
 Rokycanska 27
 31200 Plzen, Czech Republic
 Phone: ++420 377 260 342
 czsales@leutron.com
www.leutron.com/